


# TT20/TT21 SERIES TECHNICAL SPECIFICATIONS

## TT20


Combustion chamber W/D: 340/271 Weight in kg: 117

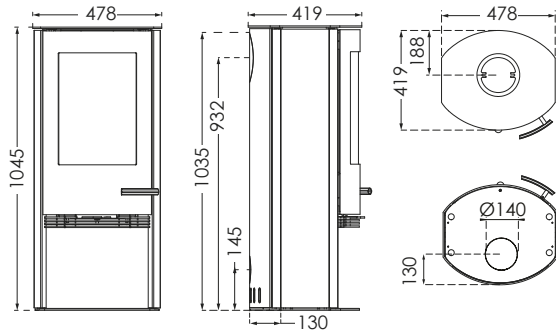

## TT20R/TT21R/TT21RL/TT21RH


Combustion chamber W/D: 340/271  
Weight in kg: 117/126/121/128

\* Applies to models: TT21R/TT21RL/TT21RH

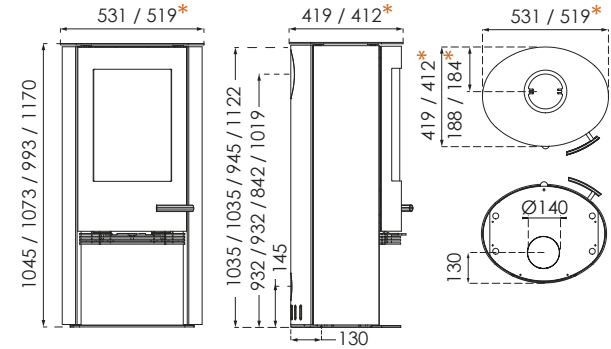


## TT20S

Combustion chamber W/D: 340/271 Weight in kg: 147

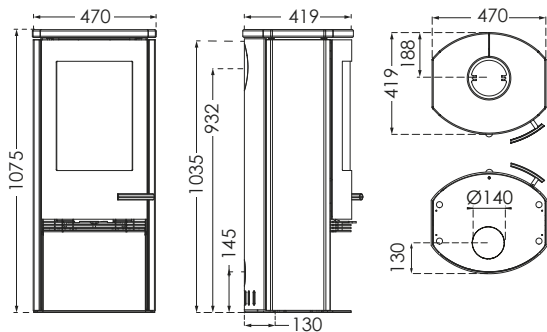

## TT20RS/TT21RS/TT21RLS/TT21RHS/ TT21RS-SA/TT21RS-WH


Combustion chamber W/D: 340/271  
Weight in kg: 169/174/168/181

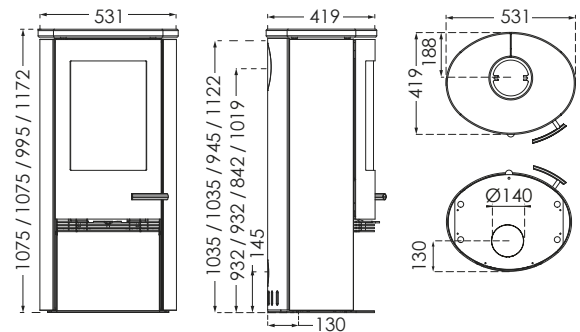

## TT20RS/TT21RS


+ Heat storage module  
+ Footing Stone

Combustion chamber W/D: 340/271  
Weight in kg: 285/290

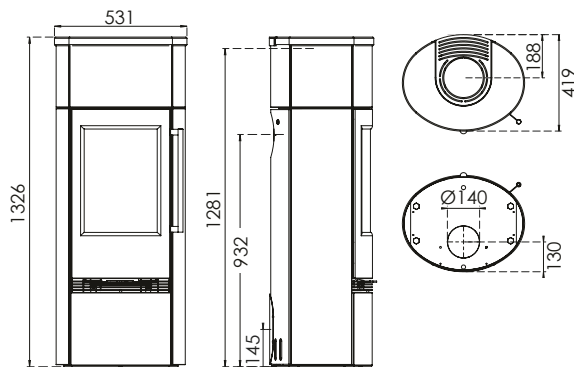

## TT21SA


Combustion chamber W/D: 340/271 Weight in kg: 139

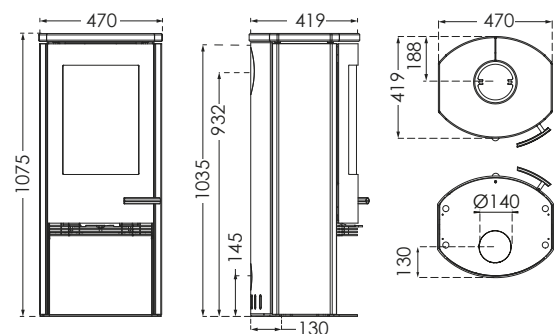

# TT20/TT21 SERIES TECHNICAL SPECIFICATIONS


## TT20BAZIC

Combustion chamber W/D: 340/271 Weight in kg: 99

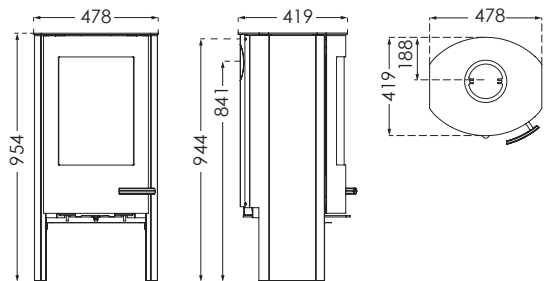


## TT20BAZIC R

Combustion chamber W/D: 340/271 Weight in kg: 99

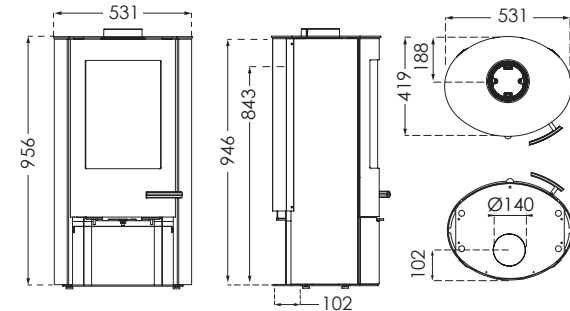

## TT21RHS + Heat storage module + Footing Stone

Combustion chamber W/D: 340/271 Weight in kg: 301

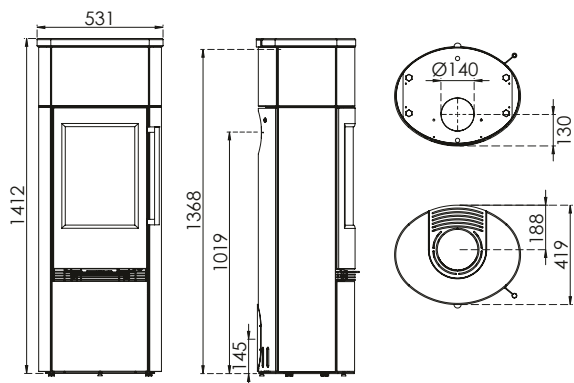


## DISTANCE TO COMBUSTIBLE MATERIAL

## TT20/TT21 SERIES


### WITH UNINSULATED FLUE PIPE

TT20 + TT20S + TT20BAZIC + TT21SA + TT20R + TT20RS + TT20BAZIC R + TT21R + TT21RS + TT21RL + TT21RLS + TT21RH + TT21RHS + TT21RS-SA + TT21RS-WH

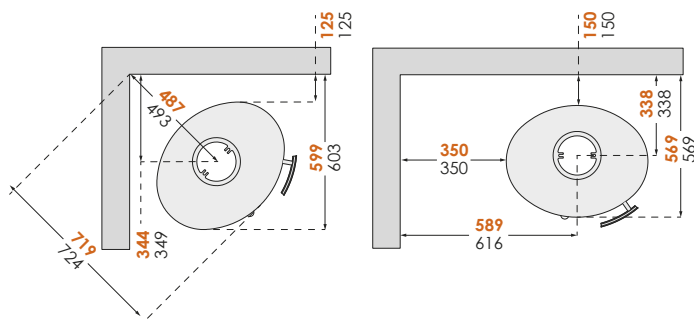

### WITH INSULATED FLUE PIPE

TT20 + TT20S + TT20BAZIC + TT21SA + TT20R + TT20RS + TT20BAZIC R + TT21R + TT21RS + TT21RL + TT21RLS + TT21RH + TT21RHS + TT21RS-SA + TT21RS-WH

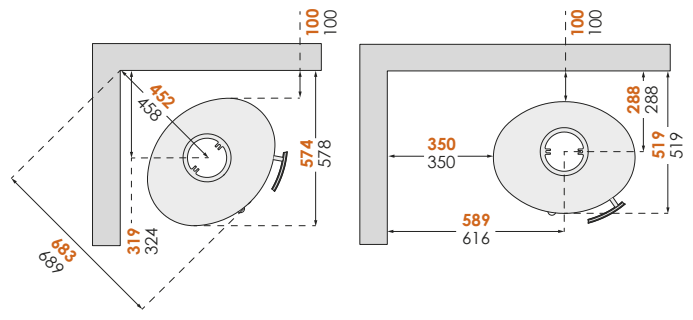

In order to avoid discolouration of painted and treated surfaces, TermaTech recommends the same distance from flammable materials as for non-flammable materials. This distance increases the convection itself around the stove and also eases cleaning. All distances relate solely to the distance of the stove from flammable materials. No account has been taken of national requirements for the use of stove flues or their distance from flammable materials.

NB! All height dimensions are without adjusting feet. Measurements are in mm.