TT20/TT21 SERIES TECHNICAL SPECIFICATIONS

TT20R/TT21R/TT21RL/TT21RH

Combustion chamber W/D: 340/271
Weight in kg: 117/126/121/136/*130/136

TT20R
TT21R/TT21RL /TT21RH

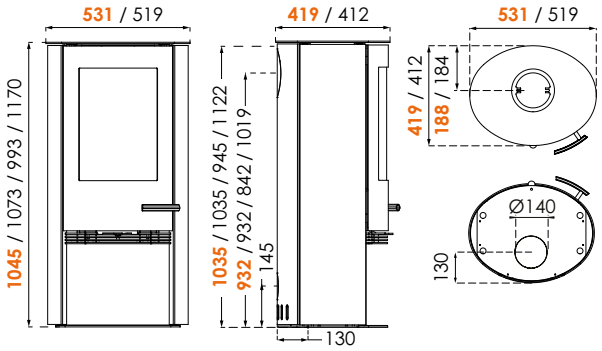

* TT21R/ TT21RH A-FLAME

TT20 BAZIC R

Combustion chamber W/D: 340/271 Weight in kg: 99

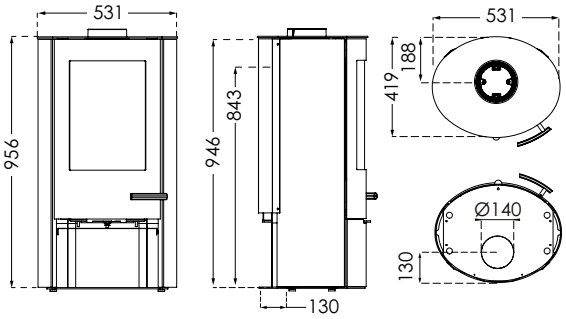

TT21RS

Combustion chamber W/D: 340/271 Weight in kg: 180*/174**

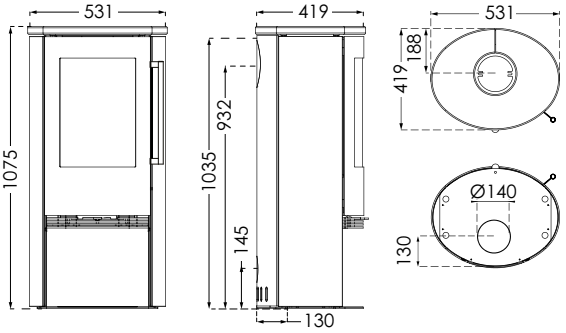

* TT21RS, marbled soapstone

** TT21RS-WH PORTO WHITE, sandstone
TT21RS BLACK, painted natural stone

TT21RS-CG/TT21RS-CM

Combustion chamber W/D: 340/271 Weight in kg: 161/*165

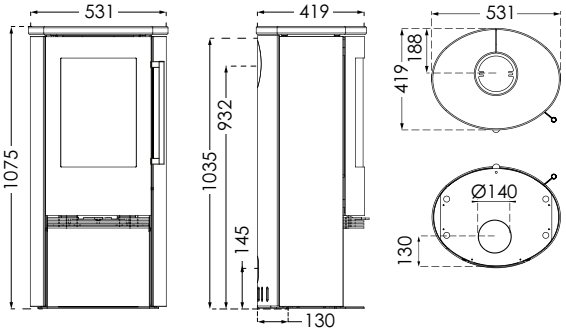

* TT21RS-CG A-FLAME, TermaStone Grey

TT21 CLASSIC

Combustion chamber W/D: 340/271 Weight in kg: 103

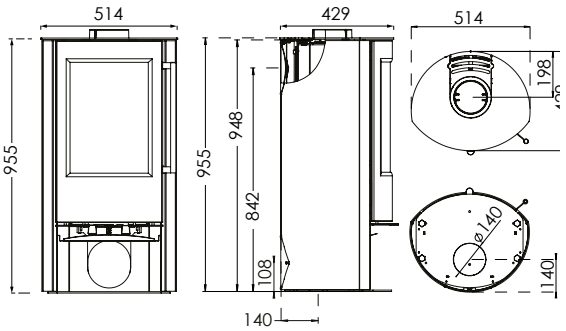

NB! All height dimensions are without adjusting feet. Measurements are in mm.

TT20/TT21 SERIES TECHNICAL SPECIFICATIONS

TT21RHS

Combustion chamber W/D: 340/271 Weight in kg: 189/*189

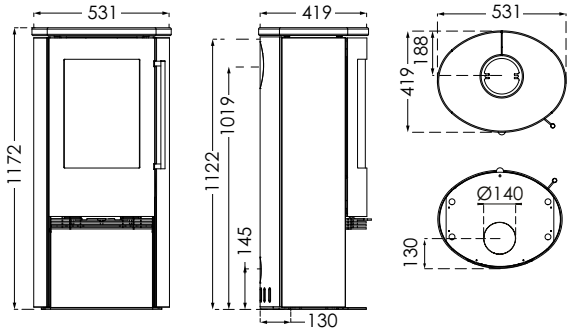

* TT21RHS A-FLAME, soapstone

TT21RS-HST

Combustion chamber W/D: 265 Weight in kg: 275

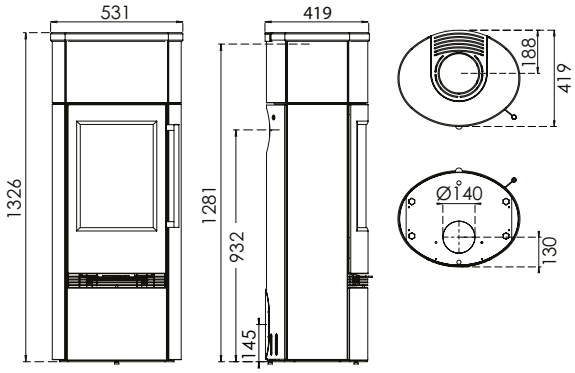

TT21RHS-HST

Combustion chamber W/D: 340/271 Weight in kg: 280

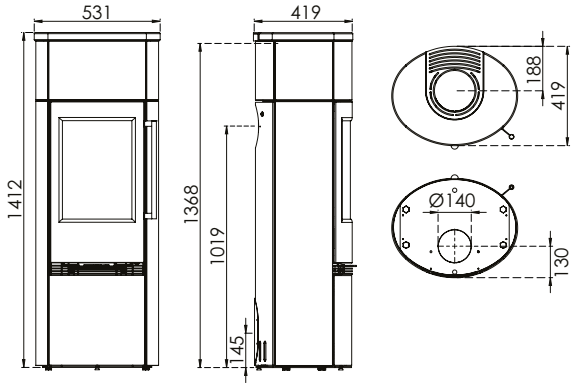

TT21RHT

Combustion chamber W/D: 340/271
Weight in kg: 145 (Accessories + 48 kg Powerstone)

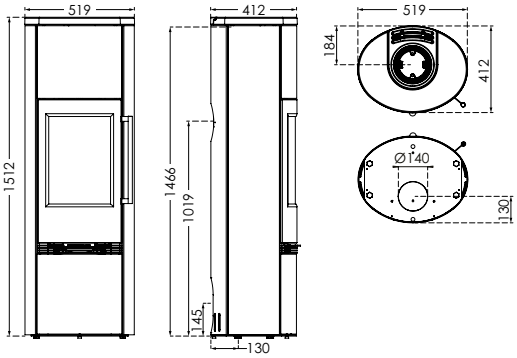

DISTANCE TO COMBUSTIBLE MATERIAL TT20/TT21 SERIES

WITH UNINSUBLATED FLUE PIPE

TT20R + TT20 BAZIC R + TT21 CLASSIC + TT21R + TT21RS +
TT21RS-CG/TT21RS-CM + TT21RS-HST + TT21RL + TT21RH + TT21RHS + TT21RHT

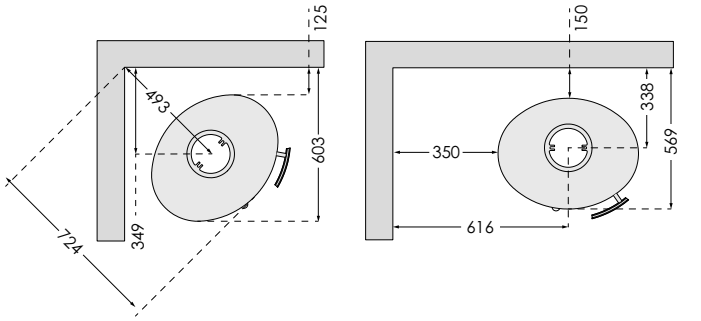

WITH INSULATED FLUE PIPE

TT20R + TT20 BAZIC R + TT21 CLASSIC + TT21R + TT21RS +
TT21RS-CG/TT21RS-CM + TT21RS-HST + TT21RL + TT21RH + TT21RHS + TT21RHT

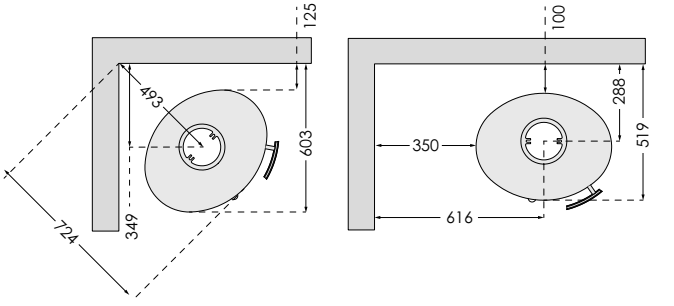

In order to avoid discolouration of painted and treated surfaces, TermaTech recommends the same distance from flammable materials as for non-flammable materials. This distance increases the convection itself around the stove and also eases cleaning. All distances relate solely to the distance of the stove from flammable materials. No account has been taken of national requirements for the use of stove flues or their distance from flammable materials.

NB! All height dimensions are without adjusting feet. Measurements are in mm.